

Countertop Gas Griddle Models TMDG24, 36 & 48



Application

The Toastmaster Countertop Gas Griddle is the most economical and flexible Countertop Griddle in the food service industry. It offers unsurpassed performance, combining a proven control system with Toastmaster quality and durability. Available in three different sizes: 24", 36", and 48".

Standard Features

- Stainless steel front including top rail.
- Aluminized steel rear and sides.
- 4" steel legs.
- 3/4" rear gas connection and universal pressure regulator supplied.
- 3/4" thick polished rolled steel plate with 4" high rear and side splash guards.

Electrical

None required.

Heating

U shaped burner is controlled by independent control of flame. One standing pilot services each burner. A 3/4" rear connection is standard. Each burner is rated for 35,000 BTU/hr for natural gas and 30,000 BTU/hr for propane gas. The TMDG has one U shaped burner per 12" of griddle. TMDG24 - 2 burners, TMDG36 - 3 burners, TMDG48 - 4 burners.

Controls

One front panel mounted control knob per burner, to allow adjustable flame height. One burner per 12" of charbroiler.

Warranty

Product warranty includes one year parts and labor. (USA only)

Approximate Weights


TMDG24 - 215 lbs. shipping.
TMDG36 - 290 lbs. shipping.
TMDG48 - 365 lbs. shipping.

Cleanability

- Stainless steel front for durability and easy cleanup.
- Easy access to grease drawer.

Countertop Gas Griddle

Models TMDG24, 36 & 48

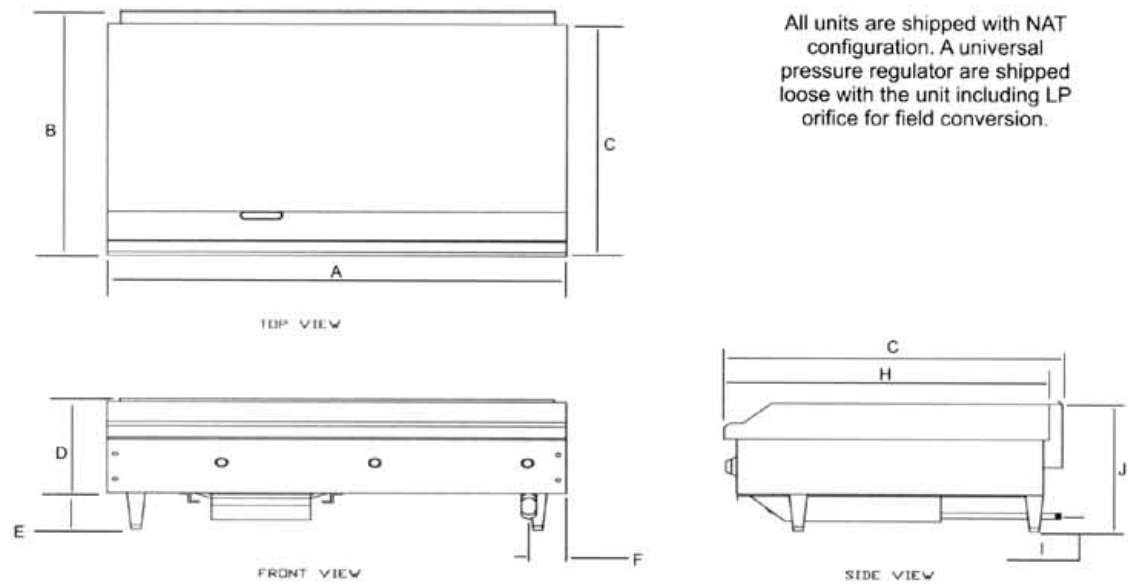

All units are shipped with NAT configuration. A universal pressure regulator are shipped loose with the unit including LP orifice for field conversion.

| DIMENSION | | | | | | | | | | |
|-----------|-------|------|-----|--------|-----|-----|----|-----|--------|-------|
| | UNITS | A | B | C | D | E | F | G | H | I |
| TMDG 24 | INCH | 24 | 27 | 25 1/2 | 10 | 4 | 3 | 27 | 25 1/2 | 2 1/4 |
| | MM | 610 | 686 | 648 | 254 | 102 | 76 | 686 | 648 | 57 |
| TMDG 36 | INCH | 36 | 27 | 25 1/2 | 10 | 4 | 3 | 27 | 25 1/2 | 2 1/4 |
| | MM | 914 | 686 | 648 | 254 | 102 | 76 | 686 | 648 | 57 |
| TMDG 48 | INC | 48 | 27 | 25 1/2 | 10 | 4 | 3 | 27 | 25 1/2 | 2 1/4 |
| | MM | 1219 | 686 | 648 | 254 | 102 | 76 | 686 | 648 | 57 |

Cabinet: Front including top rail is all stainless steel. Rear and sides are aluminized steel.

BTU Rating: Each burner rated 35,000 BTU per hour for natural gas and 30,000 BTU for propane gas.

TMDG 24 : 2 "U" burner, total of 70,000 BTU for Natural Gas and 60,000 BTU for Propane.

TMDG 36 : 3 "U" burner, total of 105,000 BTU for Natural Gas and 90,000 BTU for Propane

TMDG 48 : 4 "U" burner, total of 140,000 BTU for Natural Gas and 120,000 BTU for Propane

Gas heat control System: U shaped burner is controlled by independent control of flame. One standing pilot services each burner. A 3/4 " rear connection is standard.

Griddle Plate : 3/4" polished rolled steel plate.

•All Models: Required operating pressure are 3.5 - 5" W.C. for natural gas and 11-14" W.C. for propane gas. 3/4" NPT rear gas with pressure regulator is standard.

•Check local codes for fire and sanitary regulations.

•Flex Hose: Use only a commercial flex hose. The I.D. should not be smaller than the I.D. of the pipe from the pipe to which it is connected




INTENDED FOR COMMERCIAL USE ONLY. NOT FOR HOUSEHOLD USE.

Toastmaster, in line with its policy to continually improve its product, reserves the right to change materials or specifications without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions, or replacements for previously purchased equipment.



Countertop Gas Griddle Models TMDG24, 36 & 48

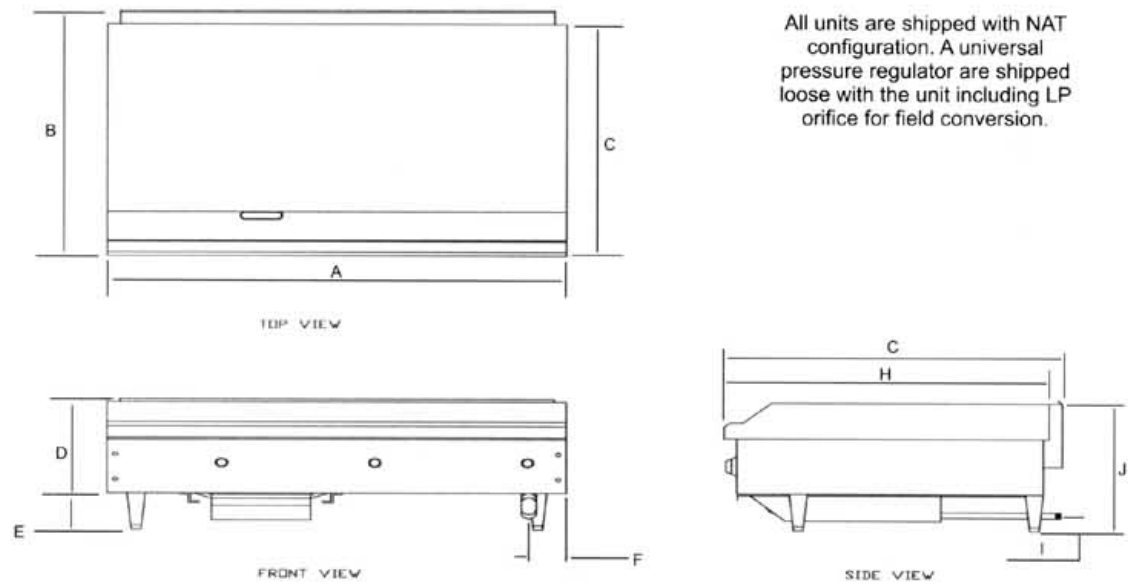

All units are shipped with NAT configuration. A universal pressure regulator are shipped loose with the unit including LP orifice for field conversion.

| DIMENSION | | | | | | | | | | |
|-----------|-------|------|-----|--------|-----|-----|----|-----|--------|-------|
| | UNITS | A | B | C | D | E | F | G | H | I |
| TMDG 24 | INCH | 24 | 27 | 25 1/2 | 10 | 4 | 3 | 27 | 25 1/2 | 2 1/4 |
| | MM | 610 | 686 | 648 | 254 | 102 | 76 | 686 | 648 | 57 |
| TMDG 36 | INCH | 36 | 27 | 25 1/2 | 10 | 4 | 3 | 27 | 25 1/2 | 2 1/4 |
| | MM | 914 | 686 | 648 | 254 | 102 | 76 | 686 | 648 | 57 |
| TMDG 48 | INC | 48 | 27 | 25 1/2 | 10 | 4 | 3 | 27 | 25 1/2 | 2 1/4 |
| | MM | 1219 | 686 | 648 | 254 | 102 | 76 | 686 | 648 | 57 |

Cabinet: Front including top rail is all stainless steel. Rear and sides are aluminized steel.

BTU Rating: Each burner rated 35,000 BTU per hour for natural gas and 30,000 BTU for propane gas.

TMDG 24 : 2 "U" burner, total of 70,000 BTU for Natural Gas and 60,000 BTU for Propane.

TMDG 36 : 3 "U" burner, total of 105,000 BTU for Natural Gas and 90,000 BTU for Propane

TMDG 48 : 4 "U" burner, total of 140,000 BTU for Natural Gas and 120,000 BTU for Propane

Gas heat control System: U shaped burner is controlled by independent control of flame. One standing pilot services each burner. A 3/4 " rear connection is standard.

Griddle Plate : 3/4" polished rolled steel plate.

•All Models: Required operating pressure are 3.5 - 5" W.C. for natural gas and 11-14" W.C. for propane gas. 3/4" NPT rear gas with pressure regulator is standard.

•Check local codes for fire and sanitary regulations.

•Flex Hose: Use only a commercial flex hose. The I.D. should not be smaller than the I.D. of the pipe from the pipe to which it is connected



INTENDED FOR COMMERCIAL USE ONLY. NOT FOR HOUSEHOLD USE.

Toastmaster, in line with its policy to continually improve its product, reserves the right to change materials or specifications without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions, or replacements for previously purchased equipment.

