



**TRUE FOOD SERVICE  
EQUIPMENT, INC.**

2001 East Terra Lane • O'Fallon, Missouri 63366  
(636)240-2400 • Fax (636)272-2408 • (800)325-6152 • Intl Fax# (001)636-272-7546  
Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.truemfg.com

Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_ Qty: \_\_\_\_\_

Model #: \_\_\_\_\_

A/A #

SIS #

Model:  
**TH-23G**

**TH Series:**  
*Reach-In Glass Swing Door Heated Cabinet*



**TH-23G**

- ▶ Provides cabinet holding temperature of 80°F to 180°F (26.6°C to 82.2°C).
- ▶ Internal fan provides low velocity, forced-air heat distribution to assure even temperatures throughout the cabinet.
- ▶ Stainless steel, tube heating element for uniform generation of electric heat. Cabinet comes with a total of 850 watts. Heating element sheathed for corrosion resistance.
- ▶ Exterior - 300 series stainless steel front. Anodized quality aluminum exterior ends and back.
- ▶ Interior - 300 series stainless steel interior liner and floor.
- ▶ Energy efficient, triple pane, thermal insulated glass door.
- ▶ Cabinet comes standard with three (3), adjustable, heavy duty chrome plated wire shelves.
- ▶ Entire cabinet structure is foamed-in-place using high density, CFC free, polyurethane insulation.

**ROUGH-IN DATA**

Specifications subject to change without notice.  
Chart dimensions rounded up to the nearest 1/8" (millimeters rounded up to next whole number).

| Model  | Doors | Cabinet Dimensions (inches) (mm) |            |             | Watts | Voltage  | Amps | NEMA Config. | Cord Length (total ft.) (total m) | Crated Weight (lbs.) (kg) |
|--------|-------|----------------------------------|------------|-------------|-------|----------|------|--------------|-----------------------------------|---------------------------|
|        |       | L                                | D†         | H*          |       |          |      |              |                                   |                           |
| TH-23G | 1     | 27<br>686                        | 29¾<br>756 | 78¾<br>1991 | 850   | 115/60/1 | 7.8  | 5-15P        | 9<br>2.74                         | 255<br>116                |

\* Height does not include 5" (127 mm) for castors or 6" (153 mm) for optional legs.

\* Height does not include 1" (26 mm) for ventilator cap.

† Depth does not include 1¾" (35 mm) for door handle.



Printed in U.S.A.

APPROVALS:

AVAILABLE AT:

Model:  
**TH-23G**

**TH Series:**  
*Reach-In Glass Swing Door Heated Cabinet*



**STANDARD FEATURES**

**DESIGN**

- True's solid door reach-in heated cabinets are designed with enduring quality that protects your long term investment.

**HEATER SYSTEM**

- Cabinet is designed to provide holding temperatures of 80°F to 180°F (26.6°C to 82.2°C). Heating system controlled by exterior on/off switch and temperature control dial.
- Stainless steel, tube heating element for uniform generation of electric heat. Cabinet comes with a total of 850 watts. Heating element sheathed for corrosion resistance.
- Low-velocity fans to assure even temperature distribution throughout the cabinet.
- Manually controlled vent located on top of the cabinet for positive humidity control.
- Exterior dial thermometer; accurate, direct reading of internal cabinet temperature.

**CABINET CONSTRUCTION**

- Exterior - 300 series stainless steel front. Anodized quality aluminum ends and back.
- Interior - 300 series stainless steel interior liner and floor.
- Insulation - entire cabinet structure is foamed-in-place using Ecomate. A new, innovative, high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- Welded, heavy duty steel frame rail, black powder coated for corrosion protection.
- Frame rail fitted with 4" diameter stem castors - locks provided on front set.

**DOOR**

- Energy efficient, triple pane, thermal insulated glass door assembly with extruded aluminum frame.

- Door fitted with 12" (305 mm) extruded aluminum handle.
- Positive seal self-closing door. Lifetime guaranteed door hinges and torsion type closure system.
- Magnetic door gasket of one piece construction, removable without tools for ease of cleaning.

**SHELVING**

- Three (3) adjustable, heavy duty chrome plated wire shelves 21 7/16" L x 23 1/4" D (545 mm x 591 mm). Four (4) chrome plated shelf clips included per shelf.
- Anodized aluminum shelf support pilasters. Shelves are adjustable on 1/2" (13 mm) increments.

**LIGHTING**

- Incandescent interior lighting; safety shielded.

**MODEL FEATURES**

- 12"L x 20"W x 1"D (305 mm x 508 mm x 26 mm) humidity pan standard for contents requiring high humidity.
- True heated cabinets are designed to hold warm baked or cooked food. Cabinets are not designed to heat ambient or cold products.
- NSF-4 compliant for open food product.

**ELECTRICAL**

- True requires that a sole use circuit be dedicated for the unit.
- Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.

**OPTIONAL FEATURES/ACCESSORIES**

Upcharge and lead times may apply.

- 6" (153 mm) standard legs.
- 6" (153 mm) seismic/flanged legs.
- Alternate door hinging (factory installed).
- Additional shelves.




115/60/1  
NEMA-5-15R

**PLAN VIEW**

CUBIC FEET 23

\* Based on ANSI/AHAM HRF-1-2004

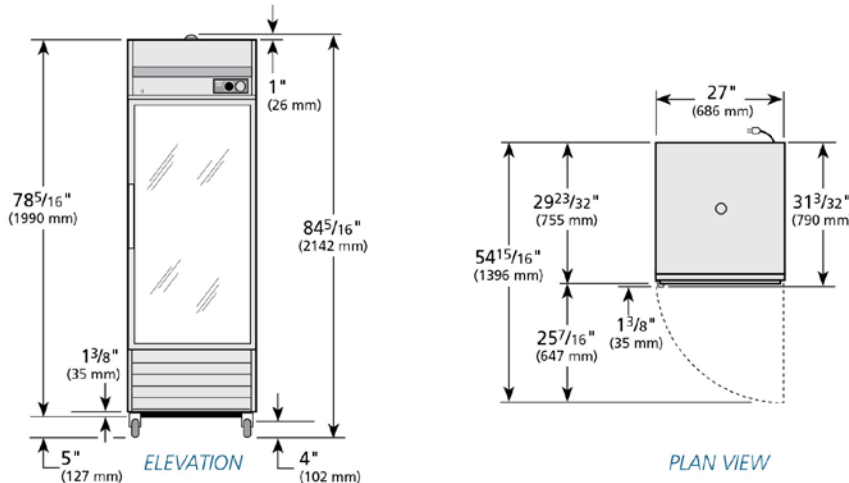

**WARRANTY**  
One year warranty on all parts and labor. (U.S.A. only)

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER  
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



|        |           |         |         |         |      |
|--------|-----------|---------|---------|---------|------|
| Model  | Elevation | Right   | Plan    | 3D      | Back |
| TH-23G | TFEY36E   | TFEY06S | TFEY06P | TFEY363 |      |

**TRUE FOOD SERVICE EQUIPMENT**