

TRUE FOOD SERVICE EQUIPMENT, INC.

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 Fax (636)272-2408 • Toll Free (800)325-6152 • Intl Fax# (001)636-272-7546 Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.truemfg.com Project Name:

Locatio Item #:

Location:	
Item #:	<i>Qty:</i>
Model #:	

Model: **TBB-24-72FR-S** **Underbar Refrigeration:**

Solid Swing Door Stainless Steel 24" Food Rated Back Bar Cooler



TBB-24-72FR-S

AIA #

SIS #

- True's refrigerated back bar coolers are designed with enduring quality and value. Our commitment to using the highest quality materials and oversized refrigeration assures colder product temperatures and years of trouble free service.
- Oversized, factory balanced, refrigeration system holds 33°F to 38°F (.5°C to 3.3°C).
- Exterior stainless steel front and sides. Matching aluminum back. All stainless steel counter top.
- Interior stainless steel.
- NSF-7 approved for open food product.
- Positive seal doors.
- Entire cabinet structure and solid doors are foamedin-place using Ecomate. A high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).



Specifications subject to change without notice. Chart dimensions rounded up to the nearest ¹/₈" (millimeters rounded up to next whole number).

		Capac 12 oz.	ity		Cabinet Dimensions (inches) (mm)					NEMA	Cord Length (total ft.)	Crated Weight (lbs.)	
Model	Doors	Cans		Shelves	L	D†	Н	HP	Voltage	Amps		(total m)	· · ·
TBB-24-72FR-S	3	105 6-pks	3	4	731⁄8	24½	35%	1⁄5	115/60/1	5.6	5-15P	7	365
					1858	623	905	N/A		N/A		2.13	166

† Depth does not include 1" (26 mm) for rear bumpers.

	APPROVALS:	AVAILABLE AT:
3/15 Print	ed in U.S.A.	

Model:

TBB-24-72FR-S

Underbar Refrigeration: Solid Swing Door Stainless Steel 24" Food Rated Back Bar Cooler



STANDARD FEATURES

DESIGN

 True's refrigerated back bar coolers are designed with enduring quality and value. Our commitment to using the highest quality materials and oversized refrigeration assures colder product temperatures and years of trouble free service.

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly (CFC free) 134A refrigerant.
- Extra large evaporator coil balanced with higher horsepower compressor and large condenser; maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C).
- Sealed, cast iron, self-lubricating evaporator fan motor(s) and larger fan blades give True back bar coolers a more efficient low velocity, high volume airflow design. This unique design ensures faster temperature pull down of warm product, colder holding temperatures and faster recovery in high use situations.
- Condensing unit accessed from behind front grill, slides out for easy cleaning and maintenance.

CABINET CONSTRUCTION

• Exterior - stainless steel front and sides. Matching aluminum back. All stainless steel counter top.

- Interior stainless steel.
- Insulation entire cabinet structure and solid doors are foamed-in-place using Ecomate. A high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- Welded, heavy duty steel frame rail, black powder coated for corrosion protection.

DOORS

- Stainless steel exterior with stainless steel liner.
- Each door fitted with 12" (305 mm) long recessed handle that is foamed-in-place with a sheet metal interlock to ensure permanent attachment.
- Positive seal doors.
- Magnetic door gaskets of one piece construction, removable without tools for ease of cleaning.
- Door locks standard.

SHELVING

- Four (4) adjustable, heavy duty, black PVC coated wire shelves. Two (2) long shelves which span behind the left and center doors: 40"L x 18"D (1016 mm x 458 mm). Two (2) shelves behind right door: 19 % "L x 18"D (493 mm x 458 mm). Four (4) chrome plated shelf clips included per shelf.
- Aluminum shelf support pilasters. Shelves are adjustable on 1/2" (13 mm) increments.

LIGHTING

• Fluorescent interior lighting. Safety shielded.

MODEL FEATURES

- Evaporator is epoxy coated to eliminate the potential of corrosion.
- Designed to accommodate a variety of beer kegs.
- NSF-7 compliant for open food product.


ELECTRICAL

• Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.



OPTIONAL FEATURES/ACCESSORIES

Upcharge and lead times may apply.
□ 6" (153 mm) standard legs.
□ 6" (153 mm) seismic/flanged legs.
□ 2½" (64 mm) diameter castors.
□ 4" (102 mm) diameter castors.
□ Additional shelves.

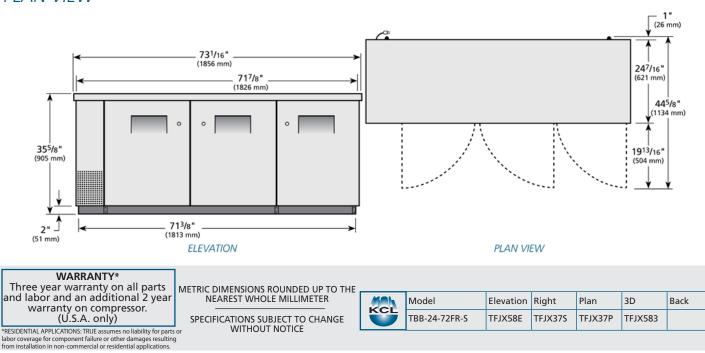

TRUE FOOD SERVICE EQUIPMENT

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 • Fax (636)272-2408 • Toll Free (800)325-6152 • Intl. Fax# (001)636-272-7546 • www.truemfg.com

PLAN VIEW